

Primary switch mode – single-phase

General

Requirements for current supply in automation, machine, and process control have continuously increased over the past years. Function safety of electronical control, as well as safe operation of automated systems are top priority.

Precisely defined supply levels still cause problems when put into practice. Voltage and load deviations reduce product lifetime and can lead into downtime. Therefore it is necessary to use a power supply unit.

Working method

The heart of a primary switch mode supply is the transformer. The primary voltage will be equal, smooth and separated with high frequency. The high frequency voltage will be transformed into a low secondary voltage and be electronical stabilized by using a transformer. The major advantage of this unit is a high efficiency and its compact, low weight, size.

Advantage

- less ripple
- exact output voltage
- integrated short-circuit protection
- galvanical separation of input and output voltage
- minimum space
- easy mounting
- mains failure bridging
- high efficiency
- wide voltage input
- less weight

Serial integrated UPS-function

With the addition of a few additional components, the MPS of 10 A can build a power supply up to 24 V DC that will be free of interruptions. A number of technical features are required.



- Two maintenance free 12 V lead acid batteries provide the power.
- An under voltage protection relay prevents deep discharge.
- A battery fuse monitors the short-circuit and is also used to activate the battery after longer periods of inactivity.

All components are in parallel use – the transfer from power supply units into battery usage is without interruption. Through this it is possible to guarantee a safe power supply.

Valid for units, which don't meet the EN 61000-3-2 guideline.

Attention

This unit was designed for application in industrial environment (closed energy networks) and do not fulfill the requirements of the EN61000-3-2: 1995 + A1 + A2 + A14/2000 regarding harmonic.

The power supply may only be connected to public energy networks

- If the total measured power is greater than 1 kW
- If the total input current per conductor exceeds 16 A
- If the measured power is under 75 W (in the future 50 W) and does not have loads for illumination.

Notice:

At parallel operation should be considered the sum of the individual power measurements

- If the unit is supplied with less than 220 V (neutral outgoing connection)

This restrictions are valid from January 1, 2001 in all european countries. Other countries can also make use of these.

Primary switch mode – single-phase

Primary switch mode PIP-*Power* +

Designed for world-wide use, the MCS-B, MCS and MPS are units, which have all the important and required international approvals. All switch modes have an additional wide voltage input to meet the required security extra low voltage (SELV).

MCS-B, the new Basic Line



Very small and up to 2.5 A

Fibre optic ring indicator for MCS-B units up to 2.5 A guarantee a clear operation.

Taking off the terminals at the input and output make wiring possible.

Easy mounting with safe distance from 5 A onwards

Mounting will be easy with the new hat DIN-rail mounting. The integrated distance switching at the power supply unit guarantee the necessary distance to the components next to it.

Save up to 50 % space

Bookform reduces surface up to 50 %.

MCS



Save up to 50 % space

Bookform reduces surface up to 50 %.

Optional switch off mode

Automatic shut-off can be individually chosen between re-start or definite shutoff.

Power Factor Correction (PFC)

To meet EN guideline regarding pre-defined limits.

Up to 20 % more rating

Units can be operated with an up to 20 % higher output rating at temperature range of 40 °C or lower.

MPS



Flat book form

For installation in control panels with a limited depth.

Remote monitoring

By using integrated potential free alarm contact in power supply.

Secure supply voltage

In a combination with batteries mains failure can be bridged with an integrated interruption free power supply function.

Quick and detail orientated diagnosis is possible through clearly arranged triple status indicator.

Teststop/Restart Button

For switching supply voltage on/off during operation.

Up to 20 % more rating

Units can be operated with an up to 20 % higher output rating at temperature ranges of 40 °C or lower.

Primary switch mode



MCS-B

Primary switch mode power supply for basic function. The units are touch protected, overload and short-circuit protected. DIN-rail mountable, small units for limited space requirements.

Input voltage:	90...265 V AC
Output voltage:	24 V DC, 4 ... 6 V DC, 12 ... 15 V DC SELV
Output current:	0.6/ 1/ 1.3/ 2.5/ 3/ 5/ 7.5/ 10 A
Temperature range:	0 ... 55 °C, from 40 °C de-rating

from page 4.5.4




MCS with and without PFC (EN 61000-3-2)

Primary switch mode power supply for demanding applications. The units are touch protected, overload and short-circuit protected. DIN-rail mountable, small units for limited space requirements.

Input voltage:	90...265 V AC
Output voltage:	24 V DC SELV, 24...28 V DC adjustable
Output current:	1.25/ 2.5/ 3/ 5/ 10/ 20 A
Temperature range:	0 ... 60 °C, from 40 °C de-rating

For industrial use is also available a version without PFC

from page 4.5.7

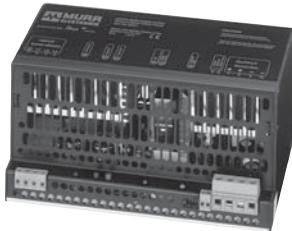

MPS

Primary switch mode power supply for demanding applications and integrated UPS function. The units are touch protected, overload and short-circuit protected. DIN-rail mountable.

Input voltage:	110, 230 V AC
Output voltage:	24 V DC SELV, 22...28 V DC adjustable
Output current:	3/ 5/ 10/ 20 A
Temperature range:	0 ... 60 °C, at < 40 % 20 % more power

from page 4.5.13



MCS-A

Primary switch mode power supply for AS-Interface systems.

The units are touch protected, short-circuit and overload protected. DIN-rail mountable, less surface usage.

Input voltage:	95...265 V AC
Output voltage:	30.5 V DC SELV
Output current:	4 A with or without earth circuit protection (EFD)
Temperature range:	0 ... 55 °C, from 40 °C de-rating

from page 4.5.17



MASI

Primary switch mode power supply for the AS-Interface network.

The units are touch protected under IP20.

Input voltage:	115, 230 V AC
Output voltage:	30.5 V DC
Output current:	2.8 A
Temperature range:	-10...60 °C

page 4.5.16

Primary switch mode – single-phase

Stabilized output voltage

Short-circuit and overload protected

Touch protected to EN 60529 (IP20)

PIP-Power *

MCS-B

Input voltage 95...265 V AC

MCS-B


Input voltage 90...265 V AC

MCS-B

Input voltage 95...265 V AC



Circuit diagram



Ordering data

Output rating

5 V DC/ 3 A 15 W

12 V DC/ 1 A 12 W

12 V DC/ 2.5 A 30 W

Art.-No.

85371

Art.-No.

85372

Art.-No.

85373

Input

Input voltage

95...265 V AC; 110...300 V DC

Input current

0.3 A (115 V AC); 0.2 A (230 V AC)

Inrush

< 15 A max. 10 A

Primary fusing

Frequency 50/60 Hz

Output

Output voltage

5 V DC SELV, ± 1 %, 4.2...6 V adjustable

Nom. output current 3 A (+40 °C), 2.5 A (+55 °C)

Efficiency 0.8

Mains failure bridging > 30 ms (115 V AC), 180 ms (230 V AC)

Ripple < 20 mV eff

Spikes < 120 mV ss

Protection short-circuit and overload protected

Status indicator green LED for output voltage

Parallel usage/Serial usage no/yes

General data

Guidelines

EN 60950-1, EN 61204-3, EN 55022 B, EN 61000-3-2

Temperature range

0...+40 °C, up to 55 °C de-rating

Relative humidity

5...95 %, no condensation

Mounting method


DIN-rail mounting to EN 60715 (TH35)

Weight

0.16 kg

Dimensions

H x B x T x TA¹⁾

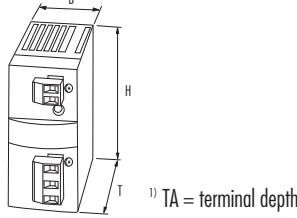

¹⁾ TA = terminal depth

Notes

¹⁾ MCS-B primary switch mode meets EN 61000-3-2 guideline.

Mounting adapter for side mounting see page 4.9.2

Primary switch mode – single-phase



Stabilized output voltage

Short-circuit and overload protected

Touch protected to EN 60529 (IP20)

PIP-Power +

Approvals: Listed

MCS-B
Input voltage 90...265 V AC




MCS-B
Input voltage 90...265 V AC

MCS-B
Input voltage 95...265 V AC



Circuit diagram



Ordering data

	Output rating	Art.-No.	Art.-No.	Art.-No.
24 V DC/ 0.6 A	15 W	85160		
24 V DC/ 1.3 A	30 W		85161	
24 V DC/ 2.5 A	60 W			85162

Input

Input voltage	90...265 V AC; 110...300 V DC	95...265 V AC
Input current	0.3 A (100 V AC); 0.2 A (230 V AC)	0.65 A (100 V AC); 0.37 A (230 V AC)
Inrush	< 20 A	1.04 A (110 V AC); 0.63 A (230 V AC)

Primary fusing

Frequency	50/60 Hz
-----------	----------


Output

Output voltage	24 V DC SELV, -1 %/+3 %		
Nom. output current	0.6 A (+50 °C), 0.5 A (+60 °C)	1.3 A (+60 °C), Uin > 170 V AC	2.5 A (+40 °C); 2.0 A (+55 °C)
Efficiency	0.81 (100 V AC); 0.83 (230 V AC)	0.82	0.85 (110 V AC); 0.87 (230 V AC)
Mains failure bridging	> 25 ms (100 V AC),	> 15 ms (100 V AC), > 100 ms (230 V AC)	> 15 ms (110 V AC), > 80 ms (230 V AC)
Ripple	< 50 mV eff		
Spikes	< 350 mV ss	< 120 mV ss	
Protection	short-circuit and overload protected		
Status indicator	green LED at output voltage		
Parallel usage/Serial usage	no/yes		

General data

Guidelines	EN 60950-1, EN 61204-3, EN 55022 B, EN 61000-3-2		
Temperature range	0...+50 °C, up to +60 °C de-rating	0...+40 °C, up to +55 °C de-rating	
Relative humidity	5...95 %, no condensation		
Mounting method	DIN-rail mounting to EN 60715 (TH35)		
Weight	0.11 kg	0.16 kg	0.23 kg
Dimensions H x B x T x TA ¹⁾	76 x 38 x 80 x 7.5 ¹⁾ mm		76 x 38 x 100.5 x 7.5 ¹⁾ mm

Dimension drawing

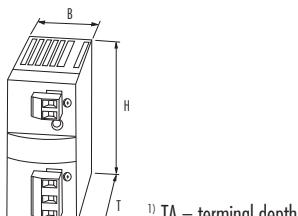

¹⁾ TA = terminal depth

Notes

MCS-B primary switch mode meets EN 61000-3-2 guideline.
Mounting adapter for side mounting see page 4.9.2

Primary switch mode – single-phase

Stabilized output voltage

Short-circuit and overload protected

**Touch protected to EN 60529
(IP20)**

PIP-Power +

Approvals:

Circuit diagram

MCS-B

Input voltage 100...265 V AC



MCS-B

Input voltage 100...265 V AC



MCS-B

Input voltage 100...265 V AC



Ordering data

Output rating

24 V DC / 5 A

120 W

24 V DC / 7.5 A

180 W

24 V DC / 10 A

240 W

Art.-No.

85163

Art.-No.

85164

Art.-No.

85165

Input

Input voltage

100...265 V AC

Input current

2 A (110 V AC); 1.16 A (230 V AC)

2.9 A (115 V AC); 1.6 A (230 V AC)

3.4 A (115 V AC); 2.2 A (230 V AC)

Inrush

< 30 A

< 37 A

< 40 A

Primary fusing

max. 10 A

max. 16 A

Frequency

50/60 Hz

Output

Output voltage

24 V DC SELV, -1 %/+ 3 %

10 A (+40 °C); 8 A (+55 °C)

Nom. output current

5 A (+40 °C), 4 A (+55 °C)

7.5 A (+40 °C), 6 A (+55 °C)

Efficiency

0.86 (110 V AC); 0.87 (230 V AC)

0.87 (115...230 V AC 24 V DC)

0.83 (115 V DC); 0.85 (230 V AC)

Mains failure bridging

> 10 ms (110 V AC), > 80 ms (230 V AC)

> 14 ms (115 V AC), > 80 ms (230 V AC)

> 15 ms (115 V AC), > 115 ms (230 V AC)

Ripple

< 20 mV eff

Spikes

< 100 mV ss

Protection

short-circuit and overload protected

Status indicator

green LED at output voltage

Parallel usage/Serial usage

no/yes

General data

Guidelines

EN 60950-1, EN 61204-3, EN 55011 A,

Temperature range

0...+40 °C, up to +55 °C de-rating

Relative humidity

5...95 %, no condensation

Mounting method

DIN-rail mounting to EN 60715 (TH35)

Weight

0.54 kg

0.7 kg

1.0 kg


Dimensions H x B x T

115 x 54 x 125 mm

115 x 54 x 145 mm

128 x 68 x 165 mm

Dimension drawing



Notes

Mounting adapter for side mounting see page 4.9.2

Primary switch mode – single-phase

Stabilized output voltage

Short-circuit and overload protected

Touch protected to EN 60529 (IP20)

PIP-Power +


Approvals: 

MCS

Input voltage 90...265 V AC



Circuit diagram

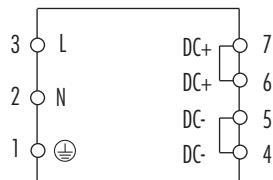

Ordering data

Output rating

Art.-No.

Art.-No.

12 V DC / 5 A

60 W

85040

5 V DC / 6 A

30 W

85041

Input

Input voltage

90...265 V AC, 110...300 V DC

Input current

1.3 A (100 V AC)/0.6 A (240 V AC)

0.6 A (100 V AC)/0.3 A (240 V AC)

Inrush

< 22 A

Primary fusing

max. 10 A

Frequency

50/60 Hz

Output

Output voltage

12 V DC, SELV $\pm 1\%$; 10...15 V adjustable

5 V DC, SELV $\pm 1\%$; 4...6 V adjustable

Nom. output current

5 A (55 °C); 5...6 A (45 °C)

6 A (60 °C); 6...7.5 A (50 °C)

Efficiency

0.85

0.8

Mains failure bridging

> 70 ms (230 V AC), 10 ms (115 V AC)

> 90 ms (230 V AC), 12 ms (115 V AC)

Ripple

< 20 mV eff

< 10 mV eff

Spikes

< 200 mV ss

< 50 mV ss

Protection

short-circuit and overload protected

Status indicator

green LED at output voltage

Parallel usage/Serial usage

no/yes

General data

Guidelines

EN 60950-1, EN 61204-3, EN 55022 B, EN 61000-3-2

Temperature range

0...+55 °C

0...+60 °C

Relative humidity

5...95 %, no condensation

Mounting method

DIN-rail mounting to EN 60715 (TH35)

Weight

0.45 kg


0.50 kg

Dimensions

H x B x T

107.5 x 42 x 97.5 mm

Dimension drawing

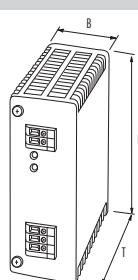

Notes

MCS primary switch mode meets EN 61000-3-2 guideline.
Mounting adapter for side mounting see page 4.9.2

Primary switch mode – single-phase



Stabilized output voltage

Short-circuit and overload protected

Touch protected to EN 60529 (IP20)

PIP- Power +

Approvals: cULus
Listed



MCS

Input voltage 90...265 V AC



MCS with PFC

Input voltage 85...265 V AC

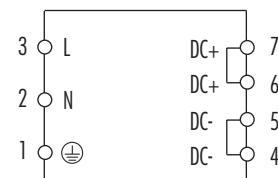

Ordering data

	Output rating
24 V DC / 2.5 A	60 W
24 V DC / 3 A	72 W

Art.-No.

Art.-No.

85064

85060

Input

Input voltage	90...265 V AC; 110...300 V DC	85...265 V AC
Input current	1.3 A (100 V AC); 0.5 A (240 V AC)	0.82 A (115 V AC); 0.4 A (230 V AC)
Inrush	< 22 A	< 20 A
Primary fusing	max. 10 A	
Frequency	50/60 Hz	

Output

Output voltage	24 V DC, SELV $\pm 1\%$; 20...30 V adjustable	24 V DC, SELV $\pm 1\%$; 24...28 V adjustable
Nom. output current	2.5 A (60 °C); 2.5...3 A (50 °C)	3 A (60 °C); 3.5 A (40 °C)
Efficiency	0.85	0.82 (230 V AC); 0.79 (115 V AC)
Mains failure bridging	> 70 ms (230 V AC), 10 ms typ (115 V AC)	> 40 ms (85...265 V AC)
Ripple	< 20 mV eff	
Spikes	< 100 mV ss	< 240 mV ss
Protection	short-circuit and overload protected	
Status indicator	green LED at output voltage	
Parallel usage/Serial usage	no/yes	

General data


Guidelines	EN 60950-1, EN 61204-3, EN 55022 B, EN 61000-3-2
Temperature range	0...+60 °C
Relative humidity	5...95 %, no condensation
Mounting method	DIN-rail mounting to EN 60715 (TH35)
Weight	0.45 kg

Dimensions H x B x T

107.5 x 42 x 97.5 mm

0.79 kg
134 x 46 x 104 mm

Dimension drawing



Notes

MCS primary switch mode meets EN 61000-3-2 guideline.
Mounting adapter for side mounting see page 4.9.2

Primary switch mode – single-phase

Stabilized output voltage

Short-circuit and overload protected

Touch protected to EN 60529 (IP20)

PIP-Power +



Approvals: 

MCS with PFC

Input voltage 90...265 V AC




Circuit diagram

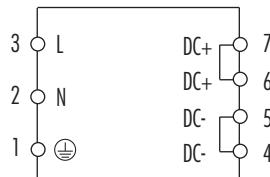

Ordering data	Art.-No.	Art.-No.	Art.-No.
Output rating			
24 V DC/ 5 A	120 W	85061	
24 V DC/ 10 A	240 W		85062
24 V DC/ 20 A	480 W		85063
Input			
Input voltage	90...265 V AC; 125...300 V DC		90...265 V AC; 130...300 V DC
Input current	1.4 A (100 V AC)/0.6 A (240 V AC)	2.7 A (100 V AC)/1.1 A (240 V AC)	5.5 A (100 V AC)/2.4 A (240 V AC)
Inrush	< 25 A		< 30 A
Primary fusing	max. 10 A		max. 16 A
Frequency			
Output	50/60 Hz		
Output voltage	24 V DC, SELV $\pm 1\%$; 24...28 V adjustable		
Nom. output current	5 A (60 °C); 6 A (40 °C, 110...265 V AC)	10 A (60 °C); 12 A (40 °C, 110...265 V AC)	20 A (60 °C); 24 A (40 °C, 110...265 V AC)
Efficiency	0.83 (115 V AC)/0.87 (230 V AC)	0.88 (115 V AC)/0.9 (230 V AC)	
Mains failure bridging	> 18 ms	> 15 ms	> 18 ms
Ripple	< 20 mV eff		
Spikes	typical	80 mV ss	200 mV ss
Protection	short-circuit and overload protected		
Status indicator	green LED at output voltage		
Choosable switch off mode	front sided bridging link (self activating re-start or definite shutoff)		
Parallel usage/Serial usage	yes/yes		
General data			
Guidelines	EN 60950-1, EN 61204-3, EN 55022 B, EN 61000-3-2		
Temperature range	0...+60 °C		
Relative humidity	5...95 %, no condensation		
Mounting method	DIN-rail mounting to EN 60715 (TH35)		screw mount. M 4, 4 pieces □ 60 x 197 mm
Weight	0.75 kg	1.5 kg	2.7 kg
Dimensions H x B x T	115 x 54 x 151 mm	127 x 68 x 204 mm	209 x 84 x 233 mm

Dimension drawing



Notes

MCS primary switch mode meets EN 61000-3-2 guideline.
Mounting adapter for side mounting see page 4.9.2

Primary switch mode – single-phase

Stabilized output voltage

Short-circuit and overload protected

Touch protected to EN 60529 (IP20)

PIP-Power +



Approvals: Listed

MCS

Input voltage 95...132 V AC



Circuit diagram

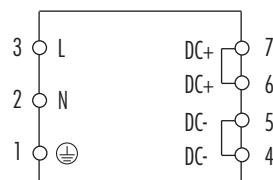

Ordering data	Art.-No.	Art.-No.	Art.-No.
Output rating			
24 V DC / 5 A	120 W	85084	
24 V DC / 10 A	240 W		85086
24 V DC / 20 A	480 W		85088

Input

Input voltage	95...132 V AC		
Input current	2.2 A (115 V AC)	4.2 A (115 V AC)	8.4 A (115 V AC)
Inrush	< 15 A	< 25 A	no
Primary fusing	max. 10 A		max. 16 A
Frequency	50/60 Hz		

Output

Output voltage	24 V DC, SELV $\pm 1\%$; 24...28 V adjustable		
Nom. output current	5 A	10 A	20 A
Efficiency	0.84	0.9	
Mains failure bridging	> 20 ms (115 V AC)	> 15 ms (115 V AC)	> 20 ms (115 V AC)
Ripple	< 20 mV eff		

Spikes	typical	80 mV ss	200 mV ss	250 mV ss
--------	---------	----------	-----------	-----------

Protection	short-circuit and overload protected
------------	--------------------------------------

Status indicator	green LED at output voltage
------------------	-----------------------------

Choosable switch off mode	front sided bridging link (self activating re-start or definite shutoff)
---------------------------	--

Parallel usage/Serial usage	yes/yes
-----------------------------	---------

General data	
--------------	--

Guidelines	EN 60950-1, EN 61204-3, EN 55022 B
------------	------------------------------------

Temperature range	0...+60 °C
-------------------	------------


Relative humidity	5...95 %, no condensation
-------------------	---------------------------

Mounting method	DIN-rail mounting to EN 60715 (TH35)
-----------------	--------------------------------------

Weight	0.6 kg	1.2 kg	2.3 kg
--------	--------	--------	--------

Dimensions H x B x T	115 x 54 x 125 mm	127 x 68 x 160 mm	170 x 84 x 201 mm
----------------------	-------------------	-------------------	-------------------

Dimension drawing	
-------------------	--



Notes	Mounting adapter for side mounting see page 4.9.2
-------	---

Primary switch mode – single-phase

Stabilized output voltage

Short-circuit and overload protected

Touch protected to EN 60529 (IP20)

PIP-Power +



Approvals: 

MCS

Input voltage 185...265 V AC




Circuit diagram

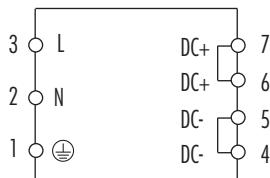

Ordering data	Art.-No.	Art.-No.	Art.-No.
Output rating			
24 V DC/ 5 A	120 W	85083	
24 V DC/10 A	240 W		85085
24 V DC/20 A	480 W		85087
Input			
Input voltage	185...265 V AC		
Input current	1.1 A (230 V AC)	2.1 A (230 V AC)	4.2 A (230 V AC)
Inrush	< 35 A	< 25 A	no
Primary fusing	max. 10 A		max. 16 A
Output			
Output voltage	24 V DC SELV, ± 1 %; 24...28 V adjustable		
Nom. output current	5 A	10 A	20 A
Efficiency	0.84	0.9	
Mains failure bridging	> 20 ms (230 V AC)	> 15 ms (230 V AC)	> 20 ms (230 V AC)
Ripple	< 20 mV eff		
Spikes	typical 80 mV ss	200 mV ss	250 mV ss
Protection	short-circuit and overload protected		
Status indicator	green LED at output voltage		
Choosable switch off mode	front sided bridging link (self activating re-start or definite shutoff)		
Parallel usage/Serial usage	yes/yes		
General data			
Guidelines	EN 60950-1, EN 61204-3, EN 55022 B		
Temperature range	0...+60 °C		
Relative humidity	5...95 %, no condensation		
Mounting method	DIN-rail mounting to EN 60715 (TH35)		
Weight	0.6 kg	1.2 kg	2.3 kg
Dimensions H x B x T	115 x 54 x 125 mm	127 x 68 x 160 mm	170 x 84 x 201 mm

Dimension drawing



Notes

Mounting adapter for side mounting see page 4.9.2

Primary switch mode – single-phase

Single-/2-phase

Stabilized output voltage

Short-circuit and overload protected

Touch protected to EN 60529 (IP20)


PIP-Power +

MCS

Input voltage 340...460 V AC



Circuit diagram

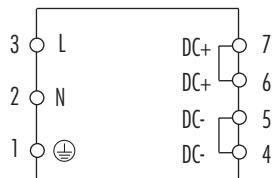

Ordering data

	Output rating	Art.-No.	Art.-No.
24 V DC / 5 A	120 W	857725	
24 V DC / 10 A	240 W		857726

Input

Input voltage	340...460 V AC	
Input current	0.65 A (400 V AC)	1.2 A (400 V AC)
Inrush	< 22 A	
Primary fusing	max. 10 A	
Frequency	50/60 Hz	

Output

Output voltage	24 V DC, SELV $\pm 1\%$; 24...28 V adjustable	
Nom. output current	5 A	10 A
Efficiency	0.85	0.87
Mains failure bridging	> 10 ms (400 V AC)	> 12 ms (400 V AC)
Ripple	< 20 mV eff	

Spikes typical	100 mV ss	200 mV ss
Protection	short-circuit and overload protected	

Status indicator	green LED at output voltage
Choosable switch off mode	front sided bridging link (self activating re-start or definite shutoff)


Parallel usage/Serial usage	yes/yes
-----------------------------	---------

General data

Guidelines	EN 60950-1, EN 61204-3, EN 55022 B	
Temperature range	0...+60 °C	
Relative humidity	5...95 %, no condensation	
Mounting method	DIN-rail mounting to EN 60715 (TH35)	
Weight	0.85 kg	1.2 kg

Dimensions	H x B x T	127 x 68 x 140 mm	127 x 68 x 160 mm
------------	-----------	-------------------	-------------------

Dimension drawing



Notes

Mounting adapter for side mounting see page 4.9.2

Primary switch mode – single-phase

Stabilized output voltage

Short-circuit and overload protected

Wide voltage input

Touch protected to EN 60529 (IP20)

PIP-Power +

Approvals: 

MPS 3



Input voltage 95...265 V AC



MPS 5

Input voltage 90...265 V AC

Circuit diagram

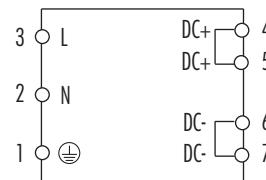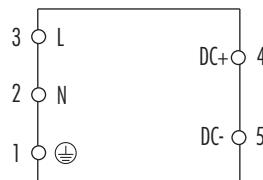

Ordering data

Output rating

Art.-No.

Art.-No.

24 V DC/3 A

72 W

85051

24 V DC/5 A

120 W

85053

Input

Input voltage

95...265 V AC

90...265 V AC

Input current

1.5 A (115 V AC); 0.75 A (230 V AC)

1.9 A (115 V AC); 0.95 A (230 V AC)

Inrush

< 20 A

< 10 A

Primary fusing

max. 10 A

Frequency

50/60 Hz

Output

Output voltage

24 V DC, SELV + 3 % / -1 %

Nom. output current

3 A (60 °C); 3.5 A (40 °C)

5 A (60 °C); 6 A (40 °C)

Efficiency

0.84

0.85

Mains failure bridging

> 8.3 ms (115 V AC); > 80 ms (230 V AC)

> 10 ms (115 V AC); > 80 ms (230 V AC)

Ripple

< 20 mV eff

Spikes

< 100 mV ss

Protection

short-circuit and overload protected, automatic re-start U < 8 V

Status indicator

green LED at output voltage > 22 V DC

Parallel usage/Serial usage

no/yes

General data

Guidelines

EN 60950-1, EN 61204-3, EN 55022 B

Temperature range

0...+60 °C

Relative humidity

5...95 %, no condensation

Mounting method

DIN-rail mounting to EN 60715 (TH35), additional plate for screw mounting Art.-No. 89500

Weight

0.6 kg

0.8 kg


Dimensions

H x B x T

132 x 75 x 71 mm

132 x 110 x 72 mm

Dimension drawing

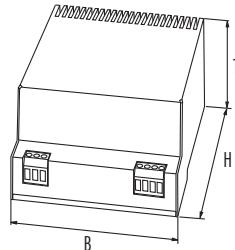

Notes

Primary switch mode – single-phase

Stabilized output voltage

Short-circuit and overload protected

Touch protected to EN 60529 (IP20)


PIP-Power +

Approvals:



MPS 10


Input voltage 95...132 V AC

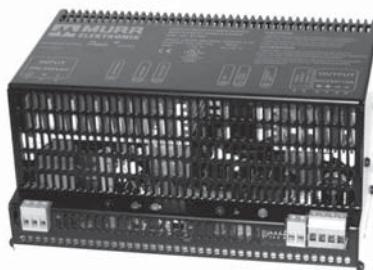

MPS 20

Input voltage 95...132 V AC

Circuit diagram

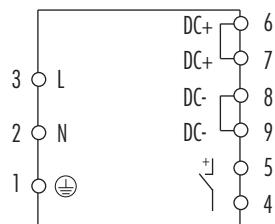

Ordering data

Output rating

24 V DC/10 A	240 W
24 V DC/20 A	480 W

Art.-No.

85054

Art.-No.

85056

Input

Input voltage	95...132 V AC
Input current	4.2 A
Inrush	no
Primary fusing	max. 10 A
Frequency	50/60 Hz


Output

Output voltage	24 V DC, SELV $\pm 1\%$; 22...28 V adjustable
Nom. output current	10 A (60 °C); 12 A (40 °C)
Efficiency	0.9
Mains failure bridging	> 10 ms (115 V AC)
Ripple; Spikes	< 20 mV eff; < 100 mV ss
Protection	short-circuit and overload protected, pre-warning and switching off when overheated or overloaded, signaling over alarm output
Status indicator	green LED in operation, red LED switched off, yellow LED pre-warning of overload of high temperature
Parallel usage/Serial usage	yes/yes
Alarm output ¹⁾	electronic relay max. 60 V DC/0.2 A, collective alarm for all faults and pre-warnings, green reset button for resigning
Test stop-button	for test purposes, the secondary voltage can be switched off short term with the test stop button

General data

Guidelines	EN 60950-1, EN 61204-3, EN 55022 B
Temperature range	0...+60 °C
Mounting method	DIN-rail mounting to EN 60715 (TH35), additional plate for screw mounting Art.-No. 89500
Relative humidity	5...95 %, no condensation
Weight	1.7 kg
Dimensions H x B x T	132 x 198 x 97 mm

Dimension drawing

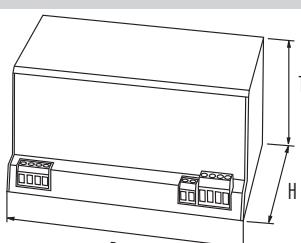

Notes

¹⁾ If units used in parallel decoupling of units via diode block. UPS components see page 4.9.3

Primary switch mode – single-phase

Stabilized output voltage

Short-circuit and overload protected

**Touch protected to EN 60529
(IP20)**

PIP- Power +

Approvals: 

MPS 10


Input voltage 185...265 V AC



MPS 20

Input voltage 185...265 V AC

Circuit diagram

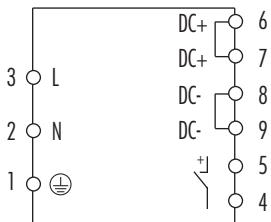

Ordering data

Output rating

Art.-No.

Art.-No.

24 V DC/10 A

240 W

85055

24 V DC/20 A

480 W

85057

Input

Input voltage

185...265 V AC

Input current

2.1 A

4.0 A

Inrush

no

Primary fusing

max. 10 A

max. 16 A

Frequency

50/60 Hz

Output

Output voltage

24 V DC, SELV $\pm 1\%$; 22...28 V adjustable

Nom. output current

10 A (60 °C); 12 A (40 °C)

20 A (60 °C); 24 A (40 °C)

Efficiency

0.9

Mains failure bridging

> 10 ms

Ripple; Spikes

< 20 mV eff; < 100 mV ss

Protection

short-circuit and overload protected, pre-warning and switching off when overheated or overloaded, signaling over alarm output

Status indicator

green LED in operation, red LED switched off, yellow LED, yellow pre-warning of overload of high temperature

Parallel usage/Serial usage

yes/yes

Alarm output¹⁾

electronic relay max. 60 V DC/0.2 A, collective alarm for all faults and pre-warnings, green reset button for resigning

Test stop-button

for test purposes, the secondary voltage can be switched off short term with the test stop button

General data

Guidelines

EN 60950-1, EN 61204-3, EN 55022 B

Temperature range

0...+60 °C

Relative humidity

5...95 %, no condensation

Mounting method

DIN-rail mounting to EN 60715 (TH35), additional plate for screw mounting Art.-No. 89500

Weight

1.7 kg

2.5 kg


Dimensions

H x B x T

132 x 198 x 97 mm

132 x 243 x 123 mm

Dimension drawing

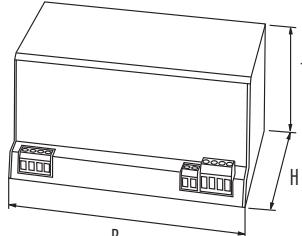

Notes

¹⁾ If units used in parallel decoupling of units via diode block. UPS components see page 4.9.3

Primary switch mode – single-phase

Supply voltage for AS-Interface Bus

Touch protected to EN 60529 (IP20)

Approvals:  

Circuit diagram


MASI - 2.8

Input voltage 115 V AC



MASI - 2.8

Input voltage 230 V AC

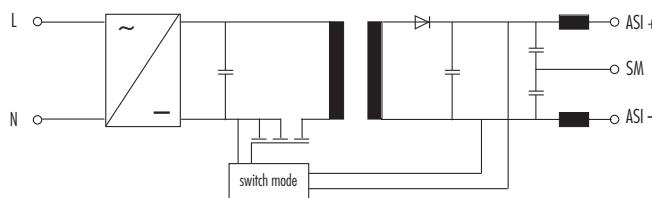

Ordering data

Art.-No.

Art.-No.

Output rating

30.5 V DC/2.8 A

85.4 W

85425

85424

Input

Input voltage

115 V AC

230 V AC

Input current

1.3 A

0.8 A

Inrush

< 14 A

< 20 A

Primary fusing

max. 10 A T

Frequency

50/60 Hz

Output

Output voltage

30.5 V DC SELV $\pm 3\%$

Max. output current

2.8 A

Efficiency

0.85

Mains failure bridging

> 30 ms (115 V AC)

> 30 ms (230 V AC)

Ripple

< 50 mVss

Protection

short-circuit and overload protected

Status indicator

green LED at output voltage

Output filter

filter to AS-Interface specification

General data

Norm

EN 60950-1, EN 61204-3, EN 55022 B

Temperature range

-10...+60 °C

Mounting method

DIN-rail mounting to EN60715 (TH35)

AS-Interface

unit meets AS-Interface specification for power supplies (PELV)


Weight

0.71 kg

Dimensions H x B x T

153 x 103 x 70 mm

Dimension drawing/Fixing centers

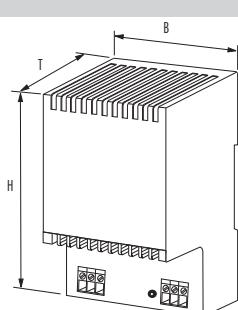

Notes

MASI - 2.8 primary switch mode meets EN 61000-3-2 guideline.

Primary switch mode – single-phase

Supply voltage for AS-Interface Bus

Touch protected to EN 60529 (IP20)


Approvals:



Circuit diagram


MCS-A 4

Input voltage 95...265 V AC

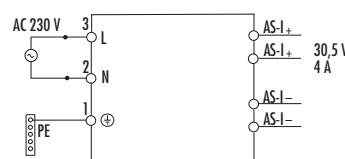

MCS-A 4 EFD

Input voltage 95...265 V AC

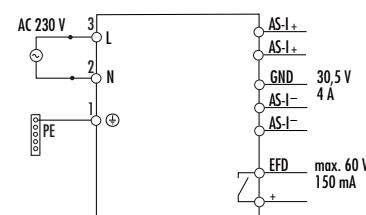

Ordering data

Output rating

30.5 V DC/4 A 122 W

Art.-No.

85381

Art.-No.

85382

Input

Input voltage

95...265 V AC

95...265 V AC

Input current

2.1 A at 110 V AC

Inrush

≤ 35 A at 230 V AC

Primary fusing

max. 10 A T

Frequency

50/60 Hz

Output

Output voltage

30.5 V DC SELV ± 2 %

Max. output current

4.0 A (40 °C)...3.4 A (55 °C)

Efficiency

0.85/240 V AC

Mains failure bridging

> 14 ms typical/110 V AC

Ripple

< 20 mV eff

Protection

short-circuit and overload protected

Status indicator

green LED at output voltage

Output filter

filter to AS-Interface specification

Earth field monitoring (EFD)

no | yes

General data

Guidelines

EN 60950-1, EN 61204-3, EN 55022 B

Temperature range

0...+40 °C

Mounting method

DIN-rail mounting to EN60715 (TH35)

AS-Interface

unit appropriates AS-Interface specification for power supply (PELV)

Weight


0.6 kg

Dimensions H x B x T x TA¹⁾

115 x 54 x 147 mm

| 115 x 54 x 147 x 16¹⁾ mm

Dimension drawing/Fixing centers

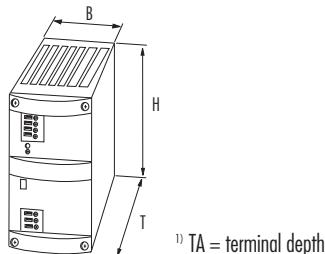

Notes

Mounting adapter for side mounting see page 4.9.2