KEL-DPZ-B

Cable entry plates







Also available in black.



Also available with threaded bushings.



Membrane on front

Product description

The KEL-DPZ-B entry plates are designed for routing cables without connectors.

The assembly of the KEL-DPZ-B with cables or pneumatic hoses can be done quick and easy. Simply make a small hole in the thin membrane and push the cables through. The KEL-DPZ-B provides strain relief and protection IP66 / UL type 12.

With an area of only 46×46 mm, up to 25 cables can be easily routed and sealed.

ST-B Plugs can be used for sealing pierced membranes if cables have been removed.

Advantages & benefits

- Space saving shape
- Dual sealing of cables acc. to IP66/UL type 12
- High cable density
- Fast and easy assembly
- Hygienic design

Specifications

Material Frame: Polyamide (PA)

Sealing plate: Elastomer

Colour grey (similar RAL 7035)


■ black

UL94-Vo, self-extinguishing Flame class IP rating IP66 (certified acc. to EN 60529) UL type rating UL type 12 (acc. to UL 50E) Temperature - 40°C to + 100°C (static) Halogen-free, silicone-free **Properties** 46 × 46 mm / page 220 - 221 **Cut-out dimensions**

Plate depth 10 mm

Accessories

ST-B Plugs FP Flanged plates 194 - 203

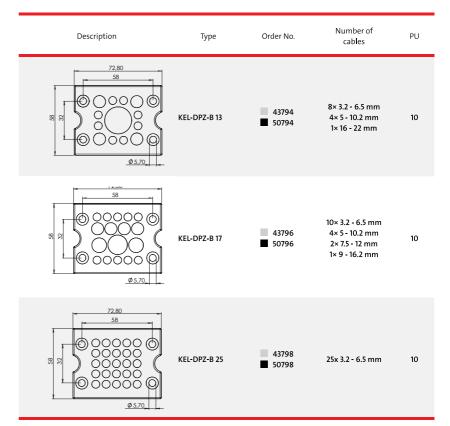

^{*} Only valid for grey product types