


EMC shield clamps for 10 × 3 mm bus bars without strain relief function



	PFS SKL	PFS SCL	SS SK	SKS
Clamping range	Order No.	Order No.	Order No.	Order No.
SKL	1.5 – 3 mm	36786.1	36611	–
	3 – 6 mm	36786.2	36612	–
	6 – 8 mm	36786.3	–	–
	8 – 11 mm	36786.4	–	–
	11 – 17 mm	36786.5	–	–
	17 – 22 mm	36786.6	–	–
SK	3 – 8 mm	–	36235.002	–
	4 – 13.5 mm	–	36236.002	–
	10 – 20 mm	–	36237	–
	15 – 32 mm	–	36238	–
SKS	2 – 5 mm	–	–	36282
	3 – 8 mm	–	–	36283
	3 – 14 mm	–	–	36284
	3 – 20 mm	–	–	36285
	5 – 28 mm	–	–	36286
	20 – 35 mm	–	–	36287
PU	10	10	10	10

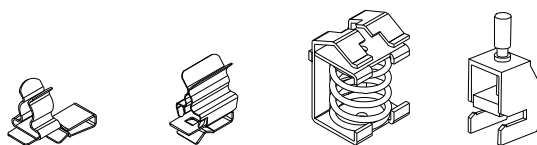

PFS|SKL

Product description

Whenever a cable shielding is required with the possibility of grounding, EMC shield clamps can be used. Shield clamps are easy to use and effective in deriving conducted disturbances.

Assembly

The shield clamps can be mounted on 10 × 3 mm bus bars.

Advantages & benefits

- Large cable shield contact area
- Easy, tool-free assembly
- The spring design requires no adjustments and will permanently maintain contact to the cable shield
- Designed for high density applications
- Shock and vibration resistant, maintenance free

Specifications

Material

MSKL-clamp,	Spring steel, zinc plated
SKL-clamp	Spring steel
PFS-foot	Sheet steel, galvanically zinc plated
SK-bracket	Cu, tin plated, current load 140 A
Bus bar	

Accessories

KEL-EMV-PF cable assembly bracket	149
MF Supports for bus bars	207