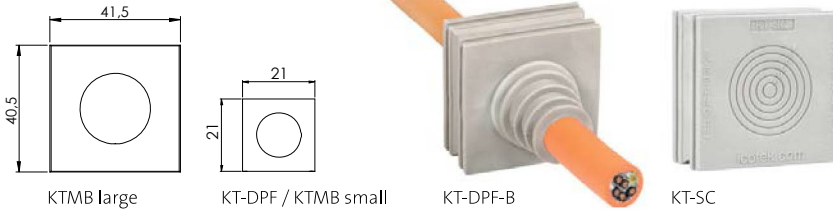


# KT-DPF | KT-SC | KTMB

## Grommets, multi-range



1.1

Description	Type	Order No.	Size KT	Clamping range	PU
KT-DPF-A	KT-DPF-A	<span style="background-color: #cccccc;">■</span> 41260 <span style="background-color: #333333;">■</span> 41360	KT small	3 - 12 mm	10
KT-DPF-B	KT-DPF-B	<span style="background-color: #cccccc;">■</span> 41261 <span style="background-color: #333333;">■</span> 41361	KT large	4 - 18 mm	10
KT-DPF-C	KT-DPF-C	<span style="background-color: #cccccc;">■</span> 41262 <span style="background-color: #333333;">■</span> 41362	KT large	14 - 26 mm	10
KT-SC	<b>NEW</b> KT-SC	41485	KT large	5 - 28 mm	10
KTMB-A	KTMB-A	41432	KT small	2.5 - 6.5 mm	10
KTMB-B	KTMB-B	41434	KT small	4 - 7.5 mm	10
KTMB-C	KTMB-C	41436	KT small	6.5 - 10 mm	10
KTMB-D	KTMB-D	41438	KT small	9.5 - 13 mm	10
KTMB-E	KTMB-E	41440	KT small	13 - 16 mm	10
Cross section KTMB					
KTMB-G	KTMB-G	41460	KT large	13 - 18 mm	10
KTMB-H	KTMB-H	41465	KT large	18 - 23 mm	10
KTMB-I	KTMB-I	41470	KT large	23 - 28 mm	10
KTMB-J	KTMB-J	41475	KT large	28 - 33 mm	10
KTMB-K	KTMB-K	41480	KT large	2x 13 - 18 mm	10

### Product description

The KT-DPF/KTMB grommets accept a wide range of cable diameters. This is a great benefit when the exact cable diameter is not known in advance. The KT-DPF/KTMB grommets are not split and therefore only usable for cables without connectors. Cutting of KT-DPF grommets: Cable diameter less 20%.

The KT-SC grommet is based on the large KT grommet and enables flexible routing and sealing of electrical cables and pneumatic hoses with diameters from 5 – 28 mm.

### Specifications grey

Material	Elastomer
Flame class	UL94-Vo, self-extinguishing
IP rating	IP54
UL type rating	UL type 12 (acc. to UL 50E)
Temperature	- 40°C to + 100°C (static)
Properties	Halogen-free, silicone-free

### Specifications black

Material	Elastomer
Flame class	UL94-HB
IP rating	IP54
Temperature	- 30°C to + 90°C (static)
Properties	Higher chemical resistance

### KMS Cable template

Page 47  
Order No. 39800



\*Only valid for grey product types

# KT-DT

## Membrane cable grommets



1.1



### Product description

The KT-DT cable grommets are designed for cables without preassembled connectors. A large number of cables can be routed utilising minimal space.

KT-DT 1 – KT-DT 5 grommets are designed to fit in KT large grommet spaces. KT-DT7 & KT-DT 8 grommets are designed to fit in KT small grommet spaces.

The KT-DT grommets are also perfectly suitable for the assembly of subsequently terminated cable harnesses.

### Advantages & benefits








- Combination of routing pre-terminated cables and cables without connectors with one cable entry frame
- Enables sub-assembly of cable harnesses
- High cable density

### Specifications

Material	<b>Elastomer</b>
Flame class	<b>UL94-Vo, self-extinguishing</b>
IP rating	<b>IP54</b>
UL type rating	<b>UL type 12 (acc. to UL 50E)</b>
Temperature	<b>- 40°C to + 100°C (static)</b>
Properties	<b>Halogen-free, silicone-free</b>

### Accessories

ST-B Plugs 93

Description	Type	Order No.	Number of cables	PU
	KT-DT 1	41500	12× max. 6.5 mm 2× max. 12.2 mm	10
	KT-DT 2	41510	16× max. 7.1 mm	10
	KT-DT 3	41520	4× max. 6.5 mm 3× max. 9.5 mm 3× max. 11.3 mm	10
	KT-DT 4	41530	9× max. 9.5 mm	10
	KT-DT 5	41540	4× max. 14.5 mm 1× max. 9.5 mm	10
	KT-DT 7	41550	4× max. 6 mm	10
	KT-DT 8	41552	2× max. 7 mm 2× max. 4 mm	10